


**PLANT MATERIAL SCHEDULE**

KEY	BOTANICAL NAME	COMMON NAME	QUAN.	SIZE
AR	ACER RUBRUM "OCTOBER GLORY"	OCTOBER GLORY RED MAPLE	1	2-1/2" CALIPER
PA	PICEA ABIES	BLUE SPRUCE	2	6'-7" TALL

**CAUTION !!**  
 THE LOCATIONS OF ALL EXISTING UNDERGROUND UTILITIES SHOWN ON THIS PLAN ARE BASED UPON ABOVE GROUND EVIDENCE (including, but not limited to, manholes, inlets, valves, and marks made upon the ground by others) AND ARE SPECULATIVE IN NATURE. THERE MAY ALSO BE OTHER EXISTING UNDERGROUND UTILITIES FOR WHICH THERE IS NO ABOVE GROUND EVIDENCE OR FOR WHICH NO ABOVE GROUND EVIDENCE WAS OBSERVED. THE EXACT LOCATIONS OF SAID EXISTING UNDERGROUND UTILITIES SHALL BE VERIFIED BY THE CONTRACTOR PRIOR TO ANY AND ALL CONSTRUCTION.

1-800-382-6544  
 CALL TOLL FREE  
 - INDIANA UNDERGROUND -

**LEGEND**

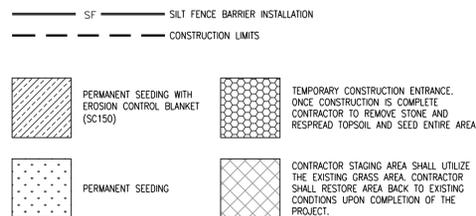

NEVER CUT LEADER THIN UP TO 1/3 OF BRANCHES RETAINING NATURAL SHAPE OF TREE. DO NOT LEAVE STUBS

ATTACH GUY WIRE AND HOSE ABOVE FIRST BRANCH.

STAKE TREES UNDER 3" CAL. USE WOOD STAKES 2 PER TREE @ 120°

GUY TREES 3" CAL. & LARGER USE 2"x4" STAKES DRIVEN BELOW GRADE. (2 STAKES 120° APART)

SET TOP OF ROOT CROWN AT GROUND LEVEL

REMOVE 50% OR WIRE BASKET AND BURLAP

3" HARD WOOD BARK MULCH


4" DIA. X 4" SAUCER AROUND PLANTING PIT

PULVERIZE SOIL EXCAVATED FROM HOLE AND USE AS BACKFILL

LOOSEN SUBGRADE AROUND CENTER MOUND


STAKE TO BE 18" BELOW PIT IN UNDISTURBED SUBGRADE

UNDISTURBED SUBGRADE BASE

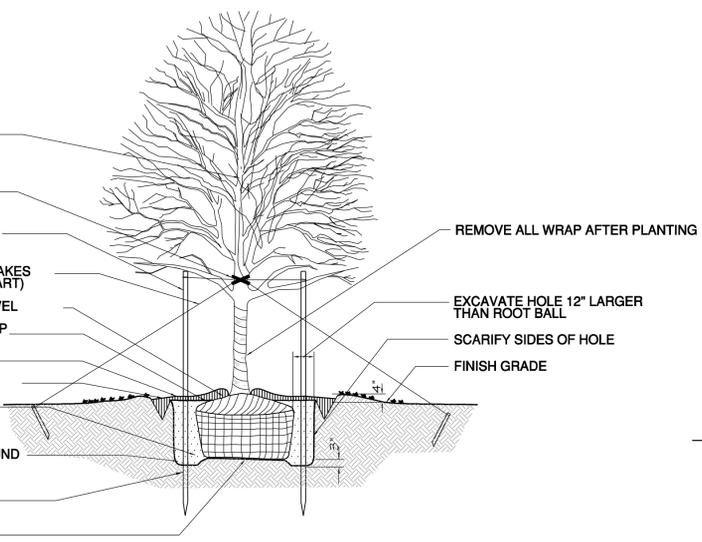


**SHADE TREE PLANTING DETAIL**

NOT TO SCALE



**PLAN**



**SECTION**

**EVERGREEN TREE PLANTING DETAIL**

NOT TO SCALE

**LANDSCAPE PLAN NOTES**

- FOR SITE LAYOUT INFORMATION SEE CIVIL DRAWINGS.
- VERIFY UNDERGROUND UTILITY LOCATIONS PRIOR TO PLANT INSTALLATION.
- CONTRACTOR TO VERIFY QUANTITIES; NOTIFY LANDSCAPE ARCHITECT OF ANY DISCREPANCIES.
- CONTRACTOR TO VERIFY FIELD CONDITIONS, NOTIFY LANDSCAPE ARCHITECT OF ANY DISCREPANCIES BETWEEN DRAWINGS AND FIELD CONDITIONS.
- STAKE ALL TREES AND SHRUBS AS INDICATED BY INDUSTRY STANDARDS.
- CONTRACTOR TO REGRADE, REPAIR AND REPLANT ALL AREAS DISTURBED BY CONSTRUCTION, INCLUDES ANY AREAS OFF-PROPERTY AND OR OTHERWISE NOT INDICATED ON PLANS.
- CONTRACTOR SHALL MAINTAIN POSITIVE DRAINAGE IN LAWN AND PLANTING BED AREAS.
- CONTRACTOR SHALL USE TREE & SHRUB DETAILS AS PLANTING GUIDELINES.
- REMOVE ALL STAKING AS SOON AS THE TREE HAS GROWN SUFFICIENT ROOTS TO OVERCOME THE PROBLEM THAT REQUIRED THE TREE TO BE STAKED. STAKES SHALL BE REMOVED NO LATER THE END OF THE FIRST GROWING SEASON AFTER PLANTING.
- TREES NORMALLY DO NOT NEED TO BE STAKED AND STAKING CAN BE HARMFUL TO THE TREE. STAKING SHOULD BE DONE ON ALL NEWLY PLANTED TREES FOR ONE YEAR. THE FOLLOWING ARE REASONS WHY TREES DO NOT REMAIN STRAIGHT.
  - TREES WITH POOR - QUALITY ROOT BALLS OR ROOT BALLS THAT HAVE BEEN CRACKED OR DAMAGED. REJECT RATHER THAN STAKE.
  - TREES THAT HAVE GROWN TOO CLOSE TOGETHER IN THE NURSERY, RESULTING IN WEAK TRUNKS. REJECT RATHER THAN STAKE.
  - PLANTING PROCEDURES THAT DO NOT ADEQUATELY TAMP SOILS AROUND THE ROOT BALL. CORRECT THE PLANTING PROCEDURE.
  - ROOT BALLS PLACED ON SOFT SOIL. TAMP SOILS UNDER ROOT BALL PRIOR TO PLANTING.
  - ROOT BALLS WITH VERY SANDY SOIL OR VERY WET CLAY SOIL. STAKING ADVISABLE.
  - TREES LOCATED IN A PLACE OF EXTREMELY WINDY CONDITIONS. STAKING ADVISABLE.

**CSO Architects**  
 ARCHITECTURE • INTERIOR DESIGN  
 8831 Kerstone Crossing - Indianapolis, IN 46240  
 Mch 317.848.7800 - Fax 317.574.0957 - csodnc.net  
 © 2011 CSO Architects, Inc. All Rights Reserved.

**WESTFIELD WASHINGTON SCHOOLS**  
 322 West Main Street  
 Westfield, Indiana 46074

**PROJECT:**  
**WESTFIELD HIGH SCHOOL ATHLETICS LOCKER ROOM BUILDING**  
 18250 NORTH UNION STREET  
 Westfield, Indiana 46074

**Scope Drawings:**  
 These drawings indicate the general scope of the project in terms of architectural design, concept, the dimensions of the building, the major architectural details and the type of structural, mechanical and electrical systems.  
 The drawings do not necessarily indicate or describe all work required for full performance and completion of the requirements of the Contract.  
 On the basis of the general scope indicated or described, the scope contractor shall furnish all items required for the proper execution and completion of the work.

**Revisions:**  
 03/04/13 AGENCY REVISIONS

Issue Date	Drawn By	Checked By
01/22/13	S. PIERRE	C. WISEMAN

**Drawing Title:**  
**LANDSCAPE PLAN**

**Certified By:**  
 CHRISTOPHER M. WISMAN  
 REGISTERED PROFESSIONAL ENGINEER  
 STATE OF INDIANA  
 PE 10504920

**Drawing Number:**  
**C801**

**Project Number:**  
**04033820700**